

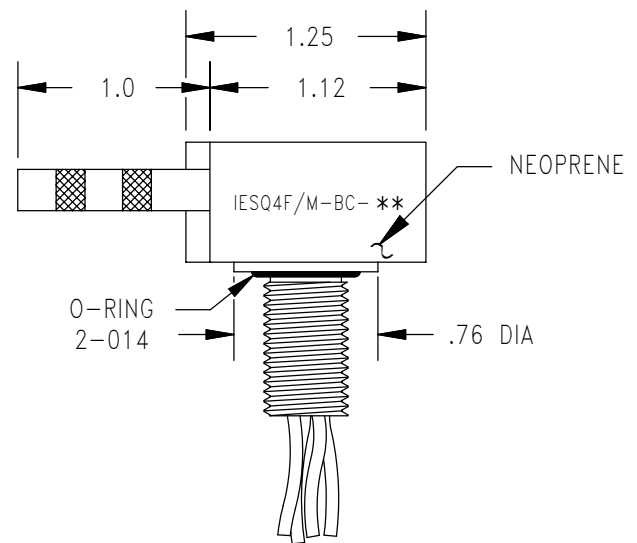
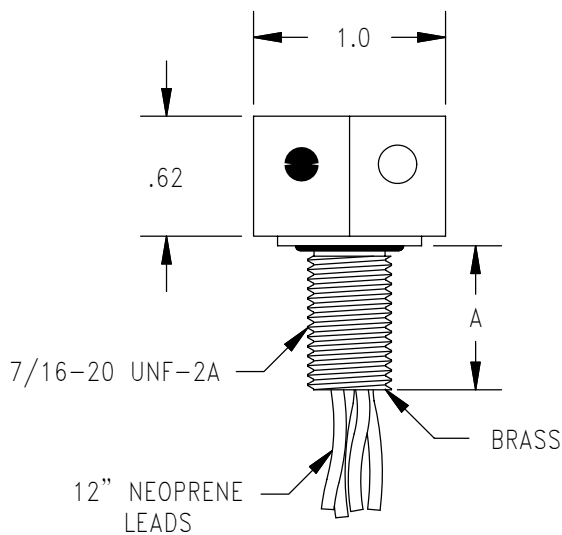
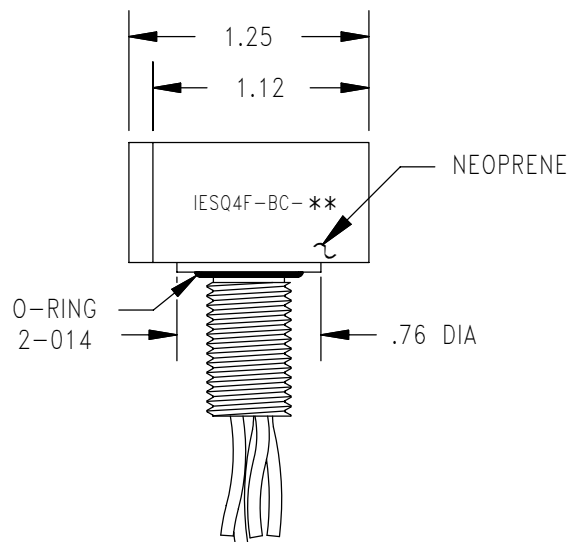
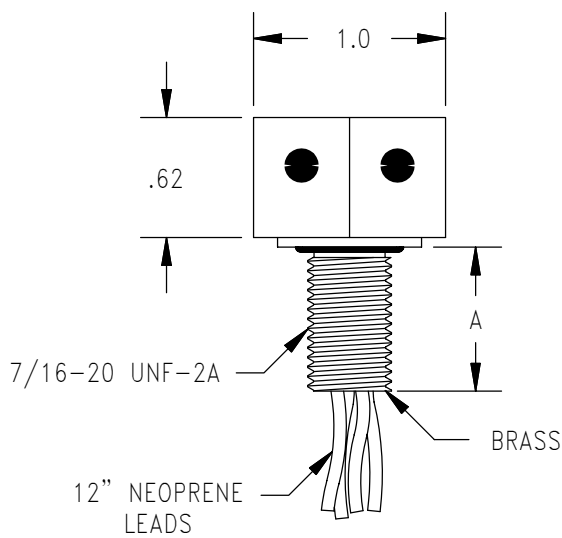
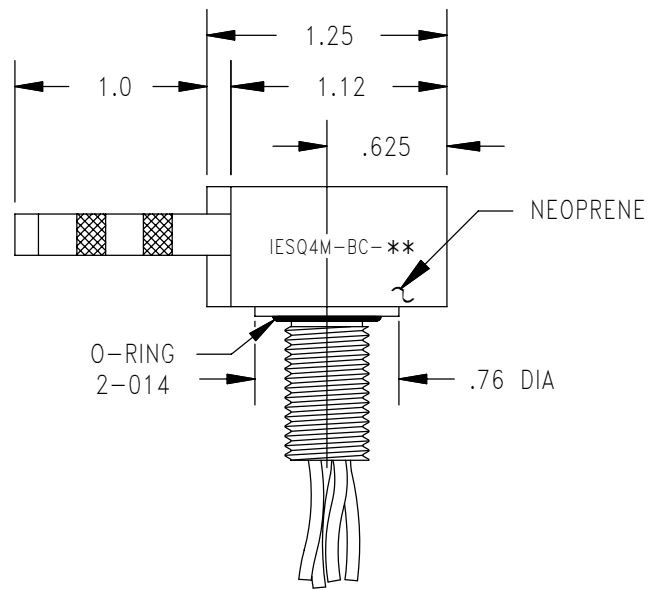


-
- DESCRIPTION AND MATERIAL
- Molded neoprene with improved sealing ability.
 - Two to eight contacts.
 - Up to 300 VDC.
 - Rated to 10,000 psi, contact factory for higher rating.
 - Bulkhead connector design open face pressure rated to 5000 PSI.
 - O-rings molded in female connector.
- CABLE
- Connectors in this series are molded on a 24” length of 18 AWG SO cable (2 contact on SJO) unless otherwise specified.
 - Bulkhead connectors have 12” teflon leads, Type E per MIL 16878/4 18 AWG, or 12” Belden 34918 leads (Neoprene jacket).
- USES
- Mates with other manufacturers connectors of same design.
 - Permits underwater plugging and unplugging with power off.
 - Light to heavy duty applications.
 - Hazardous environments.
- GUIDELINES
- All mounting surfaces require a 32 finish.
 - Lubricate male pins liberally with Dow Corning #111 Valve Lubricant or equivalent and apply a small amount in each hole of female socket. Connectors must be lubricated on a regular basis.
 - Lubricate o-rings with Dow Corning #111 Valve Lubricant or equivalent.
 - Replace o-rings when re-using connectors.
 - Align index pin prior to mating.
 - Avoid nicks and cuts around contacts as these are the sealing surfaces.
 - Elastomers can be seriously degraded if exposed to direct sunlight or high ozone levels for extended periods of time.
 - Do not over tighten bulkhead nuts.
 - Do not pull on cable to disconnect.
 - Avoid sharp bends at cable entry to connector.

IESQ4-BC

IE UNDERWATER
PLUGGABLE

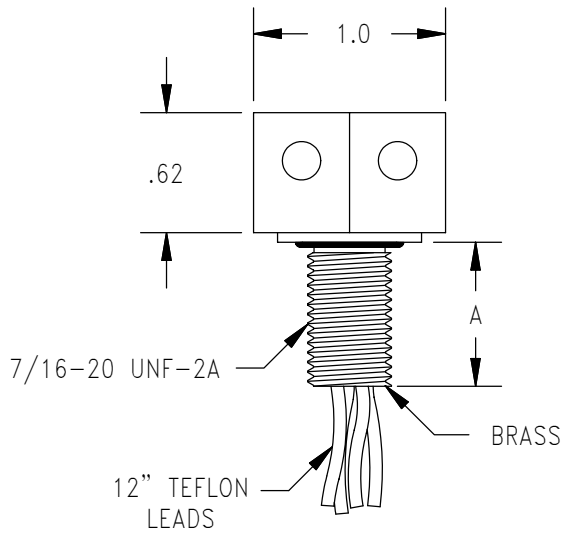

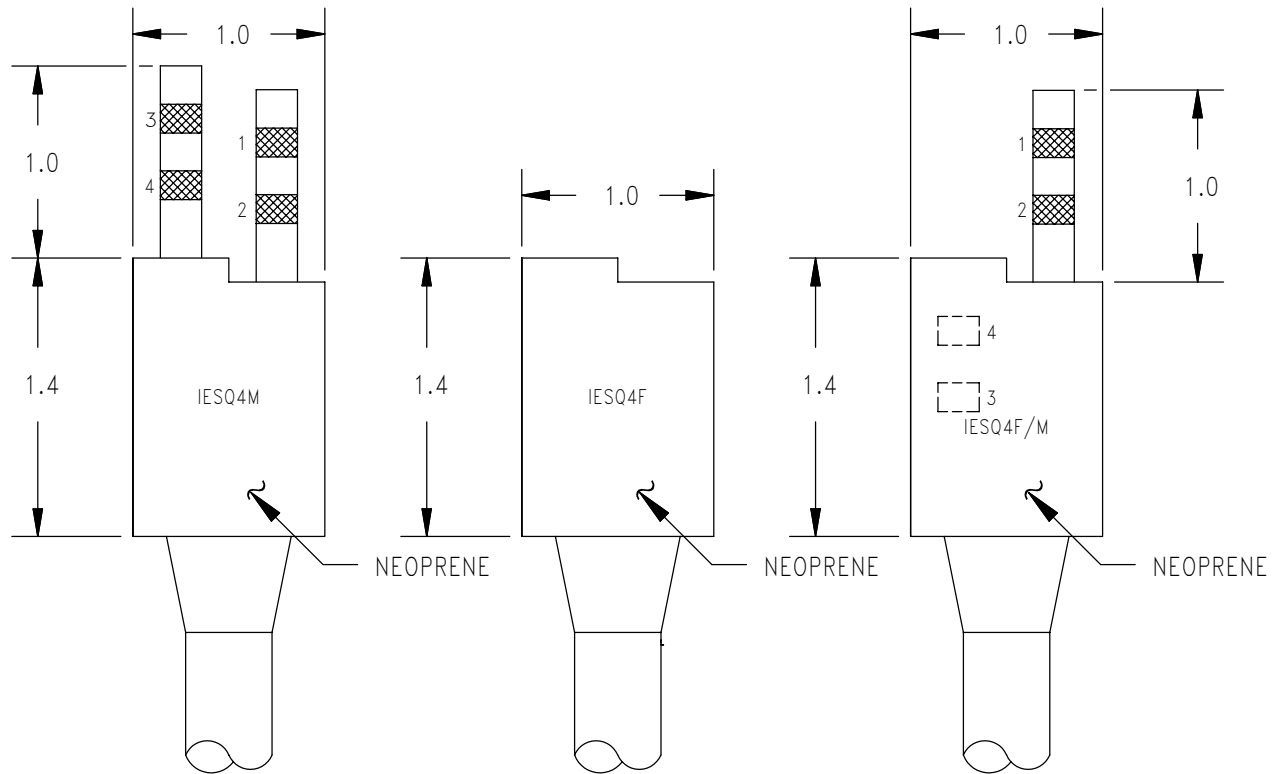

MOUNTING TORQUE FOR BC	not to exceed 100 in lbs
MATED PRESSURE RATING (psi)	5,000
DUMMY PLUG FOR IESQ4M-BC, IESQ4M	IESQ4F-DO*
DUMMY PLUG FOR IESQ4F-BC, IE2F	IESQ4M-DO*
DUMMY PLUG FOR IESQ4MF-BC, IESQ4F/M	IESQ4F/M-DO*
<p>* Dummy plugs found on Page 75 62. ** Shorted dummies available upon request. *** See chart for thread specifications. **** Specify M, F, F/M</p>	

BULKHEAD	
PART NUMBER	A
IESQ4****-BC-1	.50
IESQ4****-BC-2	.75
IESQ4****-BC-3	1.00